

Installation:

1st nut should be spanned with 40 - 45Nm.

2nd nut should be brought at least to a snug-tight condition, with special care being given to avoid over-tightening.

Nut-marking should be made acc. to figure after torque.





Maintenance:

Visual inspection of bolt torque and any loose items is made 1 year after installation, and afterwards every 5th year.

Check if the marking from bolt torque is still straight.

Check if the corrosion protection system is satisfactory.

Any findings must be repaired as soon as possible.

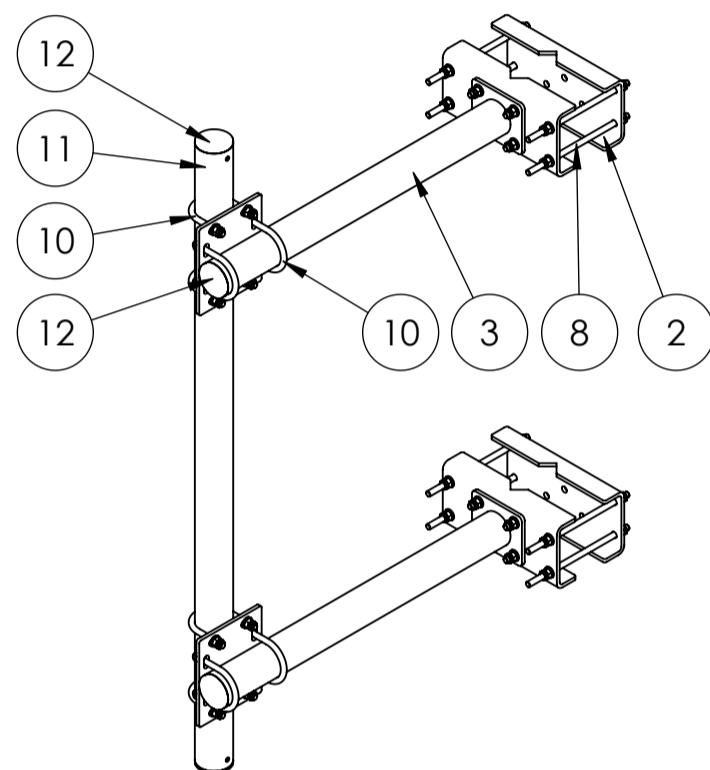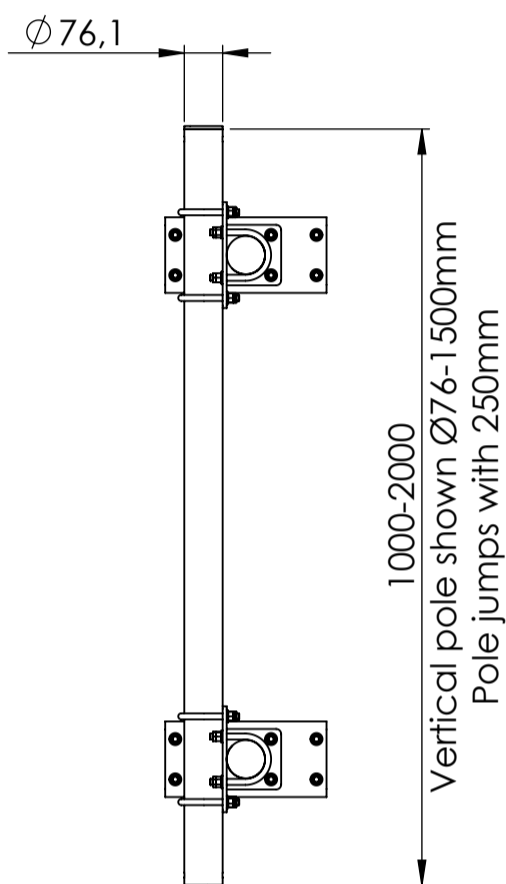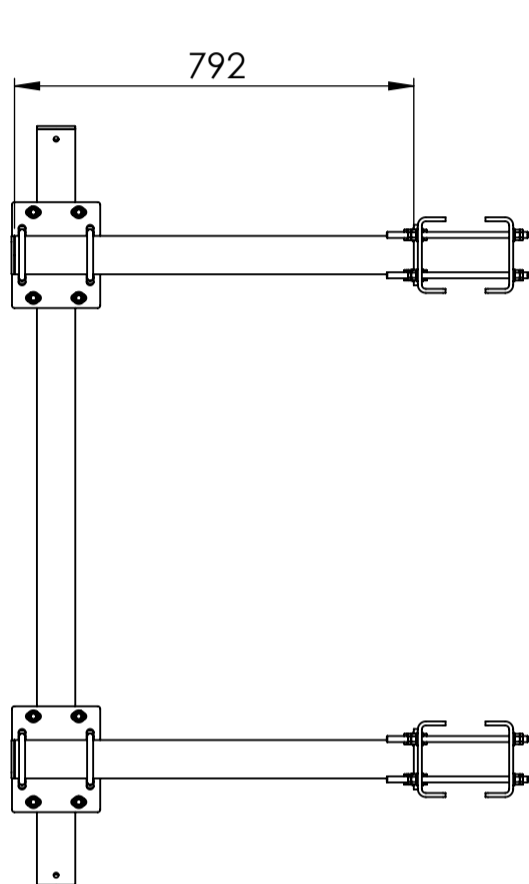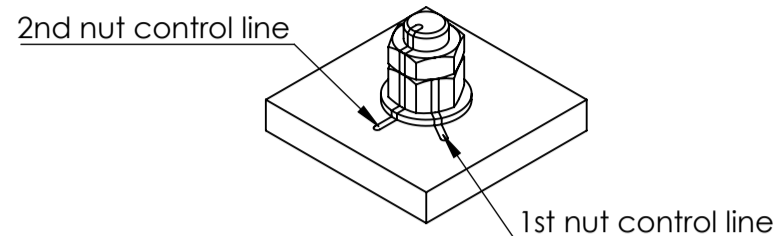

Basic wind $V_{b,0} = 27 \text{ m/s}$
 Terrain class $TC = 1$
 Max height of installation = 70m

Max loads per 1 mount pole from equipment: 100kg, $C_xA=1.0\text{m}^2$

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
2	CB-L120-180 300	C bracket L120-180	4
3	CVBM_H800	Horizontal pole for C and V bracket	2
4	Washer ISO 7089 - 12		48
5	ISO 4017 - M12 x 45-N		8
6	ISO - 4032 - M12 - W - N		40
7	ISO - 4035 - M12 - N		40
8	M12x280 DIN976	Horizontal pole bracket pin-bolts	8
9	MB-Ø76-76 300	Bracket vertical pole Ø76,1-76,1	2
10	U-bolt M12 C-C = 90		8
11	Pole Ø76-1500	Vertical pole Ø76,1 - length: 1500	1
12	GL 76x1.6-4	tubular legs for Ø76,1	4

Rev.:	Int.:	Date:	Comment
Customer.:			
Subjekt.: Antenna offset f. L60-110 with multi adjustable brackets			
Date.: 24-06-2020	Production no.:	Scale.: 1:15	Format:A3
Order no.:	Calculation:	Int.: SP/MRF	Projektion:
Drawing. No.: CBM-L120-180 H800		Note.:	Tolerance: DS/EN 1090-2 DS/ISO 2768-2-L
This drawing is our property and must not be copied, transferred or in any way used by a third party without our written permission			