

Installation:

1st nut should be spanned to a tight condition.

2nd nut should be brought at least to a snug-tight condition, with special care being given to avoid over-tightening.

Nut-marking should be made acc. to figure after torque.





Maintenance:

Visual inspection of bolt torque and any loose items is made 1 year after installation, and afterwards every 5th year.

Check if the marking from bolt torque is still straight.

Check if the corrosion protection system is satisfactory.

Any findings must be repaired as soon as possible.

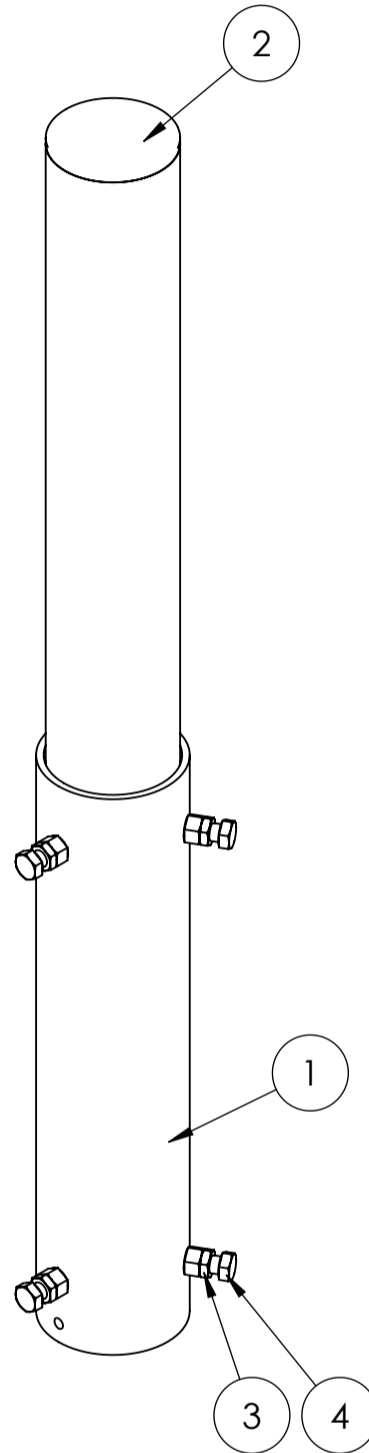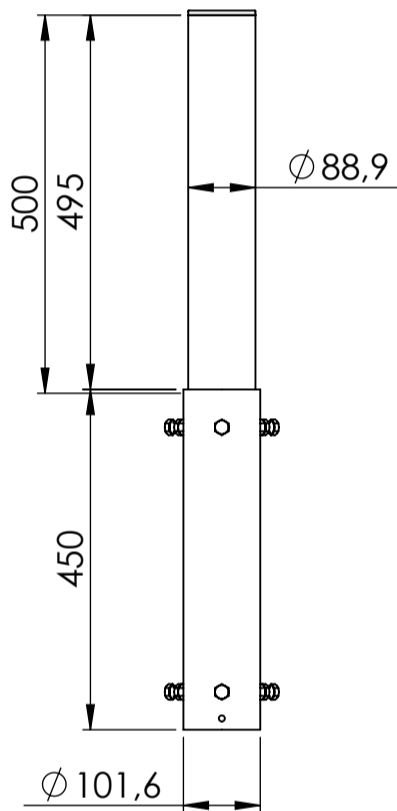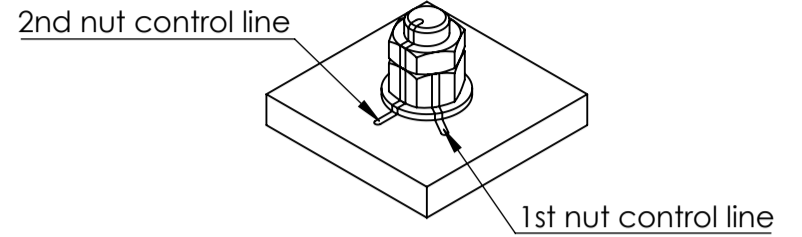

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	ET-Ø89_V500	Extension tube f. Ø88,9 - V500	1
2	GL 89x3.5-6	tubular legs for Ø88,9	1
3	ISO - 4035 - M12 - N		6
4	ISO 4017 - M12 x 30-N		6

Rev.:	Int.:	Date:	Comment
Customer.:			
Subjekt.: Extension tube f. Ø88,9 – V500			
Date.: 19-10-2021	Production no.:	Scale.: 1:10	Format:A3
Order no.:	Calculation:	Int.: SP/MRF	Projektion:
Drawing. No.: ET-Ø89 V500		Note.:	Tolerance: DS/EN 1090-2 DS/ISO 2768-2-L